

BUILT TO PROTECT.

LEARN MORE ABOUT + OUR PRODUCTS



www.peli.com



AVAILABLE IN 18 LANGUAGES!

www.pelicalogue.com



www.peli.com/webinars



EMEA

EUROPE, MIDDLE EAST & AFRICA HEADQUARTERS

PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

FRANCE

PELI PRODUCTS FRANCE
S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris, France
Tel +33 (0)1 44 83 95 63
Fax +33 (0)1 44 83 95 68
www.peli.com

UK

PELI HARDIGG UK
Unit 4, Brookfield Industrial Estate
Leacon Road
Ashford Kent TN23 4TU
Tel + 44 (0) 1233 895 895
Fax +44 (0) 1233 895 899
www.peli.com

U.S.A.

U.S.A. & GLOBAL HEADQUARTERS

23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)
Fax 310.326.3311
www.pelican.com

GERMANY

PELI PRODUCTS GERMANY GmbH
Düsseldorf Kö-Bogen
Business Center
Königsallee 2b, 5th Floor
40212 Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

UAE

PELICAN PRODUCTS FZE
JAFZA One Building A office 1511/1512
Jebel Ali Free Zone gate 5
P.O.Box 261008
Dubai – United Arab Emirates
Tel +971 4 8876550
Fax +971 4 8876549
www.pelican.com
www.peli.com

PELICAN HARDIGG

147 North Main Street
South Deerfield, MA 01373
Tel (800) 542 73 44
Fax (413) 665 8330
www.pelican.com

* We also have offices in Canada, Japan, China, Australia, South Korea and India

PELI LIMITED LIFETIME* WARRANTY

Peli Products, S.L.U. ("Peli") guarantees its lights and headlamps for a lifetime* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see www.peli.com/warranty

* Lifetime guarantee not applicable where prohibited by law.



PELI™ LIGHTS CATALOGUE



HIGH OUTPUT
LEDs



SAFETY APPROVED
MODELS



RECHARGEABLE
MODELS



Follow us on:



©2017 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicalogue.com.
Part No. 0030-000-501E JAN 17



Check out our 40 Years
of Protection video:



LIFETIME GUARANTEE* - PROVEN FOR OVER 40 YEARS

TABLE + OF CONTENTS

PERFORMANCE	3
SAFETY	4-5
PELI LIGHTS	
Small Lights	6-7
Medium Lights	8-10
Large Lights	11
Atex Lights	12-15
Tactical Lights	16-17
Headlights	18-19
Right Angle	20
Light Mounting Systems & Holsters	21
Specifications	22-24
CUSTOM LABELS & PELI LIGHTING TOOLS	25
FULL LINE OVERVIEW	26-27



Uros Podlogar, professional photographer


PERFORMANCE

+ STANDARDS AND RATINGS (Applicable to torches only)



LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.
Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

+ GLOSSARY OF TERMS

CANDELA A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

LUX The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

INTEGRATING SPHERE An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (INGRESS PROTECTION) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

RECHARGEABLE Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



SAFETY

IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

Photo by Ricardo Alves

To meet the exacting requirements of ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

Need more information about ATEX? Please visit www.peli.com

CE  II 1 G Ex ia op is IIC T6/T4 Ga

ATEX code corresponding to the 1930Z0 torch



+ COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATION


HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	- Oil Refinery - - Paint Warehouse - - Offshore Oil Rig - - Spray Booth -	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑ ↓ LEAST
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	- Coal Mine - - Grain Silo - - Munitions Factory - - Hay Storage Facility -	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	- Paper Mill - - Woodworking Facility - - Textile Mill - - Cotton Gin -	Division 1 (Hazard Likely)	N/A	
			Division 2 (Hazard Not Likely)	N/A	

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
Division 1: Where volatile substances can exist all of the time or some of the time under normal operating conditions.	Division 2: Where volatile substances are not likely to exist under normal operating conditions.	Category 1 / Zone 0: Flammable material present for long periods (more than 1.000 hours* a year).	Category 3 / Zone 2: Flammable material present for short periods (less than 10 hours* a year).
		Category 2 / Zone 1: Flammable material present in normal operation (10- 1.000 hours* a year).	

* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

+ DIAGRAM OF CLASS / DIVISIONS / ZONES

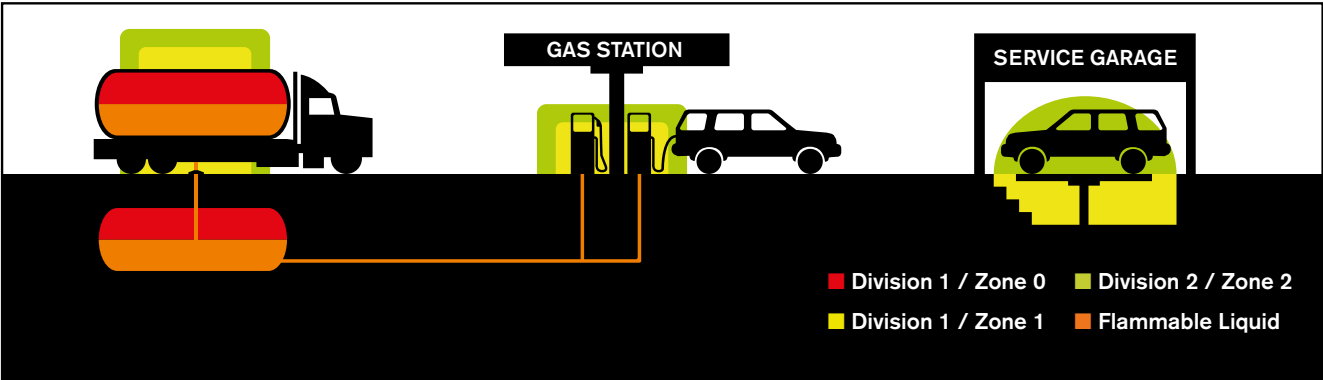

SMALL LIGHTS

When compact is a must or just a convenience, choose from Peli's range of powerful lights. Whether composite or alloy, certified or coloured, you'll find the perfect model for your next job.

1810

LIGHT SOURCE//
LED

BATTERIES//
4 LR 41 Alkaline (included)

LENGTH//
3.8 cm (1.50")

■ ■ ■ ■ ■ ■ ■ ■



LUMENS
16
RUN TIME
8h 30m

MITYLITE™ 1900Z1

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
10.4 cm (4.09")

CERTIFICATIONS//
II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db

■ ■



LUMENS
11
RUN TIME
1h 30m

MITYLITE™ 1900

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
10.4 cm (4.09")

CERTIFICATIONS//
CI, D1/CI, D2

■ ■ ■



LUMENS
11
RUN TIME
1h 30m

1910

LIGHT SOURCE//
LED

BATTERIES//
1 AAA Alkaline (included)

LENGTH//
9.7 cm (3.8")

MODES//
High / Low

■ ■ ■ ■ ■ ■ ■ ■



LUMENS
72
RUN TIME
4h

1920

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
14.0 cm (5.5")

MODES//
High / Low

■ ■ ■ ■ ■ ■ ■ ■



LUMENS
120
RUN TIME
8h 30m

L1™ 1930Z0

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
6.7 cm (2.64")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga

■



LUMENS
12
RUN TIME
4h 15m

VB3™ 2220Z1

LIGHT SOURCE//
LED

BATTERIES//
2 CR2032 Lithium (included)

LENGTH//
8.9 cm (3.50")

CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb

■ ■



LUMENS
9
RUN TIME
34h

MITYLITE™ 2340

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (not included)

LENGTH//
15.9 cm (6.25")

CERTIFICATIONS//
CI II, D2

■



LUMENS
10
RUN TIME
4h 30m

L1™ 1930

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
6.7 cm (2.64")

CERTIFICATIONS//
CI, D1/CI, D2

■ ■



LUMENS
12
RUN TIME
4h 15m

MITYLITE™ 1965Z0

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline

LENGTH//
13.9 cm (5.48")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da

■ ■



LUMENS
34
RUN TIME
3h 45m

MITYLITE™ 2300

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (included)

LENGTH//
14.3 cm (5.62")

CERTIFICATIONS//
CI, D1/CI, D2

■



LUMENS
11
RUN TIME
4h 30m

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

MEDIUM LIGHTS

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Peli's line of safety certified lighting tools. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your torch in an emergency.

PELILITE™ 1800

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 C Alkaline (not included)
LENGTH//
15.2 cm (6")
CERTIFICATIONS//
CI II, D2



SABRELITE™ 2000

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
3 C Alkaline (not included)
LENGTH//
19.8 cm (7.79")
CERTIFICATIONS//
CI, D1/CII, D2



Photoluminescent
2003PL Shroud

SABRELITE™ 2000Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
3 C Alkaline (not included)
LENGTH//
19.8 cm (7.79")
CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb



Photoluminescent
2003PL Shroud

SABRELITE™ 2010

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
CI II III, D1



Photoluminescent
2013PL Shroud

SABRELITE™ 2010Z0

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIC T135c T200c Da IP6X



Photoluminescent
2013PL Shroud

STEALTHLITE™ 2400Z1

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
4 AA Alkaline (included)
LENGTH//
16.5 cm (6.49")
CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb



STEALTHLITE™ 2400

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
4 AA Alkaline (included)
LENGTH//
16.5 cm (6.49")
CERTIFICATIONS//
CI, D1/CII, D2



STEALTHLITE™ 2410 LED

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II III, D1



STEALTHLITE™ 2410Z0

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T135°C Da



STEALTHLITE™ 2450

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
4 NiMH (included)
LENGTH//
16.5 cm (6.5")
CERTIFICATIONS//
CI II, D2




STEALTHLITE™ 2460

LIGHT SOURCE//
LED
BATTERIES//
4 NiMH (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II, D2



STEALTHLITE™ 2460Z1

LIGHT SOURCE//
LED
BATTERIES//
4 NiMH (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

THE SABRELITE ALLOWED ME TO SAVE ANOTHER LIFE

Some months ago, while at a fire, I accidentally dropped my light between a wall space. It fell about 5 to 6 meters before hitting the concrete floor below. To my relief there just happened to be an opening in the base of the wall where my SabreLite landed. It was still shining when I picked it up, and after a quick inspection I couldn't find a thing wrong with it. After this I carried searching the bedrooms of the house where I found an elderly lady whom we successfully removed from the house. I was amazed because I feel that the quality of the light allowed me to save the life of another human being.

François Gireau, professional firefighter Paris area




3315Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.6 cm (6.14")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



3315RZ1-RA

NON-ATEX VERSION
COMING SOON



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
21 cm (8.27")

CERTIFICATIONS//
II 2G Ex ib op is IIC T4 Gb

MODES//
High / Low / Flashing



NEW

3310PL PHOTOLUMINESCENT

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.6 cm (6.14")

MODES//
High / Low / Flashing
(torch body glows in the dark)

(Photoluminescent)



3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.6 cm (6.14")

INCLUDES//
3310PL and Wall Mountable Case
(torch body glows in the dark)

(Photoluminescent)



3315RZ1

NON-ATEX VERSION
COMING SOON



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
15.5 cm (6.11")

CERTIFICATIONS//
II 2G Ex ib op is IIC T4 Gb

MODES//
High / Low / Flashing



3325Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.4 cm (6.06")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Peli is also a leader of high performance lithium-ion technology in portable lighting.

9410L LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
22.2 cm (8.75")

MODES//
High / Low / Flashing
Full Time Battery Indicator



9415Z0 LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
4 C NiMH (included)

LENGTH//
22.2 cm (8.75")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

ATEX LIGHTS

Zone 0 & 1 (Cat. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.



L1™ 1930Z0

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
6.7 cm (2.64")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga



SABRELITE™ 2000Z1

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
3 C Alkaline (not included)

LENGTH//
19.8 cm (7.79")

CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb



Photoluminescent
2003PL Shroud

SABRELITE™ 2010Z0

LIGHT SOURCE//
LED

BATTERIES//
3 C Alkaline (not included)

LENGTH//
20.6 cm (8.11")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIC T135c T200c Da IP6X



Photoluminescent
2013PL Shroud

STEALTHLITE™ 2400Z1

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
16.5 cm (6.49")

CERTIFICATIONS//
II 2 G Ex e ib IIC T4 Gb



STEALTHLITE™ 2460Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
17.8 cm (7")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



HEADSUP LITE™ 2610Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
3.8 cm (1.49")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



VB3™ 2220Z1

LIGHT SOURCE//
LED

BATTERIES//
2 CR2032 Lithium (included)

LENGTH//
8.9 cm (3.50")

CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb



STEALTHLITE™ 2410Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
17.8 cm (7")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T135°C Da



*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

HEADSUP LITE™ 2690Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
7.1 cm (2.81")

CERTIFICATIONS//
IM1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIIC T65°C Da



HEADSUP LITE™ 2755Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga

MODES//
High / Low / Flashing



HEADSUP LITE™ 2785Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7.6 cm (3.00")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb

MODES//
High / Medium / Low / Downcast / Spot / Flashing



3315RZ1

NON-ATEX VERSION
COMING SOON



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion

LENGTH//
15.5 cm (6.11")

CERTIFICATIONS//
II 2G Ex ib op is IIC T4 Gb

MODES//
High / Low / Flashing



HEADSUP LITE™ 2745Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga

MODES//
High / Low



HEADSUP LITE™ 2765Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



3315Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.6 cm (6.14")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



3315RZ1-RA

NON-ATEX VERSION
COMING SOON



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion

LENGTH//
21 cm (8.27")

CERTIFICATIONS//
II 2G Ex ib op is IIC T4 Gb

MODES//
High / Low / Flashing



3325Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.4 cm (6.06")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



LITTLE ED™ 3660Z1



LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



3765Z0



LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga

MODES//
High / Low / Downcast



LITTLE ED™ 3610Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



3715Z0



LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da

MODES//
High / Low / Downcast



Photoluminescent
3713PL Shroud

9415Z0 LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
4 C NiMH (included)

LENGTH//
22.2 cm (8.75")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



THE PELI 3715Z0 IS AN ABSOLUTE FAVOURITE

**SURVIVAL
+ STORIES**

Compact and it really packs a lot of light. The three types of light are really convenient for different purposes. For instance, the large light to explore incidents and the three small LED lights to read maps or walk in dark areas. I also use this light to train in our hazmat suits. The thick rubber gloves are not an issue when working with the light. The button on top is really good to operate and the grip on the side helped me during the training. This light is really impressive. Compared to our current lights, it really stands out!

Dutch firefighter - Fire Dpt. Brabant-Noord, Boxmeer

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.

2350

LIGHT SOURCE//
LED

BATTERIES//
1 AA Alkaline (included)

LENGTH//
10.7 cm (4.23")

MODES//
High / Strobe / Low

LUMENS
100
RUN TIME
15h



2370

LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)

LENGTH//
16.3 cm (6.43")

MODES//
High / Low / Red / Blue

LUMENS
106
RUN TIME
41h 15m



2360 LED

LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)

LENGTH//
15.7 cm (6.2")

MODES//
High / Strobe / Low

LUMENS
375
RUN TIME
13h



2380

LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)

LENGTH//
16.4 cm (6.44")

MODES//
High / Low / Spot To Flood

LUMENS
159
RUN TIME
13h



2380R

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
16.5 cm (6.48")

MODES//
High / Strobe / Low / Spot To Flood

LUMENS
305
RUN TIME
25h



7060

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
22 cm (8.65")

MODES//
High / Strobe / Medium / Low / Self Programmable

LUMENS
368
RUN TIME
45h



7600

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
15.7 cm (6.19")

MODES//
High / Strobe / Medium / Low

LUMENS
944
RUN TIME
29h



8060

LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
32.2 cm (12.67")

MODES//
High / Strobe / Medium / Low / Flashing / Self Programmable

LUMENS
803
RUN TIME
69h



7000

LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion (Included)

LENGTH//
13.5 cm (5.31")

MODES//
High / Strobe / Medium / Low / Self Programmable

LUMENS
602
RUN TIME
16h



7100

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
13 cm (5.12")

MODES//
High / Strobe / Medium / Low

LUMENS
695
RUN TIME
9h 15m



M11 8050

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
NiMH (included)

LENGTH//
28.6 cm (11.25")

LUMENS
164
RUN TIME
2h 15m



HEADLAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

HEADSUP LITE™ 2610Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
3.8 cm (1.49")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



HEADSUP LITE™ 2680

LIGHT SOURCE//
Recoil™ LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
11.8 cm (4.64")

CERTIFICATIONS//
CI II III, D2



HEADSUP LITE™ 2690Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
7.1 cm (2.81")

CERTIFICATIONS//
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIC T65°C Da



2720 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
6.3 cm (2.48")

MODES//
Variable Light Output / Spot to Flood /
Red Night Vision Friendly LEDs




2740 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Low /
Flashing / Red LED



HEADSUP LITE™ 2745Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga

MODES//
High / Low



2750 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Low / Flashing /
Red LED / Low Battery Warning

■ ■ ■ (Photoluminescent)



HEADSUP LITE™ 2755Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



2760 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Medium / Low / Downcast /
Flashing / Red LED / Full-time Battery
Level Indicator

■ ■ ■ (Translucent Red)



2780R HEADLAMP


LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
7.6 cm (3.00")

MODES//
High / Medium / Low
Flashing / Downcast
Full-time Battery / Level Indicator

■ ■ ■ (Photoluminescent)
3 Interchangeable Covers Included



HEADSUP LITE™ 2765Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



HEADSUP LITE™ 2785Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7.6 cm (3.00")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb

MODES//
High / Medium / Low / Downcast / Spot / Flashing



*For more information on the ATEX Zone 0 & 1 lights, see page 4-5



*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

RIGHT ANGLE LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) torches often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

VERSABRITE™ 2250

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
2 AA Alkaline (included)

LENGTH//
9.8 cm (3.87")

CERTIFICATIONS//
CI II, D2



LITTLE ED™ 3610Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



3715Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da

MODES//
High / Low / Downcast



Photoluminescent
3713PL Shroud



3315RZ1-RA

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
21 cm (8.27")

CERTIFICATIONS//
II 2G Ex ib op is IIC T4 Gb



LITTLE ED™ 3660Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



3765Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga

MODES//
High / Low / Downcast



NEW



LIGHT MOUNTING SYSTEMS AND HOLSTERS



CAT. NO. 610

FRONT SIGHT MOUNT

Fits Peli Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine (special orders only).



CAT. NO. 620

SIDE SLING MOUNT

Fits Peli Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine (special orders only).



CAT. NO. 630

FOREGRIP MOUNT

Fits Peli Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5 (special orders only).



CAT. NO. 2326

REMOTE PRESSURE SWITCH

Our tactical pressure switch replaces the standard tailcap on the torch. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip. Fits Peli Lights: 2320, 2330, 2390 (Cat. No. 2326). COLOUR : Black // WT.: 2.0 oz. (special orders only).

		CAT. NO. 2407 Nylon Holster	CAT. NO. 7078 Nylon Holster	CAT. NO. 7106	CAT. NO. 7606	CAT. NO. 7607	CAT. NO. 8057 Nylon Holster		
HOLSTER STYLES +									
	CAT NO.								
	2300								
	2320								
	2330								
	2360								
	2370								
	2380								
	2380R								
	2340/NVG								
	2400/NVG	•							
	2400PL	•							
	2450	•							
	2410	•							
	2410PL	•							
	2460	•							
	7000			•					
7060				•					
7100									
7600					•	•			
8040							•		
8050							•		
		CAT. NO. 710	CAT. NO. 711	CAT. NO. 750	CAT. NO. 770	CAT. NO. 780 FULL HOUSE	CAT. NO. 781 ACE	CAT. NO. 782 ALL IN	CAT. NO. 783 DOUBLE DOWN
LIGHT AND HEADLIGHT HOLDER STYLES +									
	CAT NO.								
	2140			•					
	2250	•		•					
	2300			•	•		•		
	2320				•		•		
	2330				•		•		
	2340/NVG		•	•	•		•		
	2350						•		
	2360						•		
	2370						•		
	2380/2380R						•		
	2390				•		•		
	2400/2400N/NVG/PL	•	•	•	•	•			
	2410/PL	•	•	•	•	•			
	2430	•	•	•	•	•			
	2450	•	•	•	•	•			
	2460	•	•	•	•	•			
	3310				•				•
	3315				•				•
3320				•		•			
3330				•		•			
7000						•			
All Headlamps									•

*For more information on the ATEX Zone 0 & 1 lights, see page 4-5

CAT NO.		BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
SMALL LIGHTS	1810	4 LR 41 Alkaline ^A	0.01	3.8	16	8h 30m	23	137	IPX4	N/A	■ ■ ■ ■ ■ ■ ■ ■
	1900	2 AAA Alkaline ^A	0.05	10.4	11	1h 30m	45	571	IPX7	CI, D1/CII, D2	■ ■ ■ ■
	1900Z1	2 AAA Alkaline ^A	0.05	10.4	11	1h 30m	45	571	IPX7	II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db	■ ■
	1910	1 AAA Alkaline ^A	0.04	9.7	72*, 14***	1h 45m*, 4h***	64*, 28***	1031*, 198***	IPX7	N/A	■ ■ ■ ■ ■ ■ ■ ■
	1920	2 AAA Alkaline ^A	0.06	14	120*, 12***	2h 45m*, 8h 30m***	87*, 27***	1893*, 184***	IPX7	N/A	■ ■ ■ ■ ■ ■ ■ ■
	1930	4 LR 44 Alkaline ^A	0.03	6.7	12	4h 15m	17	70	IPX4	CI, D1/CII, D2	■ ■
	1930Z0	4 LR 44 Alkaline ^A	0.03	6.7	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	■
	1965Z0	2 AAA Alkaline ^A	0.05	13.9	34	3h 45m	45	512	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da	■ ■
	2220Z1	2 CR2032 Lithium ^A	0.03	8.9	9	34h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■ ■
	2300	2 AA Alkaline ^A	0.1	14.3	11	4h 30m	43	478	IPX4	CI, D1/CII, D2	■
	2340	2 AA Alkaline	0.1	15.9	10	4h 30m	43	461	IPX4	CI II, D2	■
	1800	2 C Alkaline	0.22	15.2	21	7h	131	4370	IPX7	CI II, D2	■
MEDIUM LIGHTS	2000	3 C Alkaline	0.36	19.8	53	5h	158	6234	IPX7	CI, D1/CII, D2	■
	2000Z1	3 C Alkaline	0.36	19.8	39	6h	177	7852	IPX7	II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb	■ ■
	2010	3 C Alkaline	0.38	20.6	109	32h	144	5189	IPX7	CI II III, D1	■
	2010Z0	3 C Alkaline	0.38	20.6	129	22h	135	4582	IPX7	II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X	■
	2400	4 AA Alkaline ^A	0.2	16.5	45	3h 45m	125	3934	IPX7	CI, D1/CII, D2	■
	2400Z1	4 AA Alkaline ^A	0.2	16.5	38	4h 30m	156	6194	IPX7	II 2 G Ex e ib IIC T4 Gb	■ ■
	2410	4 AA Alkaline ^A	0.21	17.8	183	5h 45m	184	8480	IPX7	CI II III, D1	■
	2410Z0	4 AA Alkaline ^A	0.21	17.8	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■ ■
	2450	Rechargeable NiMH ^A	0.22	16.5	35	3h 30m	122	3735	IPX7	CI II, D2	■ ■
	2460	Rechargeable NiMH ^A	0.22	17.8	183	5h	179	8050	IPX7	CI II, D2	■ ■
	2460Z1	Rechargeable NiMH ^A	0.22	17.8	181	5h	153	5828	IPX7	II 2 G Ex ib IIC T4 Gb	■
	3310PL	3 AA Alkaline ^A	0.18	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline ^A	0.18	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3315Z0	3 AA Alkaline ^A	0.18	15.6	138	19h	146	5350	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	■
	3315RZ1	Rechargeable Lithium-Ion ^A	0.2	15.5	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IPX7	II 2G Ex ib op is IIC T4 Gb	■
	3315RZ1-RA	Rechargeable Lithium-Ion		21	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IPX7	II 2G Ex ib op is IIC T4 Gb	■
	3325Z0	3 AA Alkaline ^A	0.17	15.4	155	16h	140	4926	IPX7	II 1 G Ex ia IIC T4 Ga	■
	9410L	Rechargeable Lithium-Ion ^A	1.27	22.2	1203*, 553***	4h 30m*, 10h 30m***	430*, 287***	46,328*, 20,616***	IPX4	N/A	■ ■
LARGE LIGHTS	9415Z0	4 C NiMH ^A	1.65	22.2	392*, 144***	4h 30m*, 11h***	392*, 234***	32767*, 13747***	IPX4	II 1 G Ex ia IIC T4 Ga	■

*High | **Medium | ***Low | ^ Batteries Included | Additional approvals may apply. For details go to www.peli.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

CAT NO.		BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
TACTICAL LIGHTS	2350	1 AA Alkaline ^A	0.1	10.7	100*, 10***	1h 45m*, 15h***	141*, 44***	5018*, 493***	IPX7	N/A	■
	2360	2 AA Alkaline ^A	0.15	15.7	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline ^A	0.18	16.3	106*, 13***	3h 45m*, 41h 15m***	158*, 52***	6283*, 684***	IPX4	N/A	■
	2380	2 AA Alkaline ^A	0.19	16.4	159*, 23***	3h 15m*, 13h***	149*, 56***	5579*, 779***	IPX4	N/A	■
	2380R	Rechargeable Lithium-Ion ^A	0.19	16.5	305*, 30***	3h 30m*, 25h***	159*, 50***	6317*, 613***	IPX7	N/A	■
	7000	2 CR123 Lithium ^A	0.16	13.5	602*, 311**, 64***	1h 30m*, 2h**, 16h***	233*, 165**, 75***	13604*, 6830**, 1409***	IPX7	N/A	■
	7060	Rechargeable Lithium-Ion ^A	0.29	22	368*, 150**, 18***	3h*, 9h**, 45h***	199*, 125**, 43***	9953*, 3922**, 473***	IPX4	N/A	■
	7100	Lithium-Ion ^A	0.12	13	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9413*, 4247**, 358***	IPX8	N/A	■
	7600	Lithium-Ion ^A	0.19	15.7	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8	N/A	■
	8050	Rechargeable NiMH ^A	0.51	28.6	164	2h 15m	256	16448	IPX4	N/A	■
	8060	Rechargeable NiMH ^A	0.66	32.2	803*, 447**, 25***	2h 30m*, 4h**, 69h***	359*, 265**, 62***	32252*, 17492**, 958***	IPX4	N/A	■
	2610Z0	3 AAA Alkaline ^A	0.91	3.8	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■
HEAD LAMPS	2680	4 AA Alkaline ^A	0.27	11.8	79	10h	123	3789	IPX7	CI II III, D2	■
	2690Z0	3 AAA Alkaline ^A	0.12	7.1	74	11h	92	2124	IPX7	I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da	■
	2720	3 AAA Alkaline ^A	0.11	6.3	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline ^A	0.09	5.7	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
	2745Z0	3 AAA Alkaline ^A	0.94	5.7	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IPX4	II 1 G Ex ia IIC T4 Ga	■ ■
	2750	3 AAA Alkaline ^A	0.1	5.7	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)
	2755Z0	3 AAA Alkaline ^A	0.1	5.7	72*, 34***	6h*, 15h***	57*, 40***	807*, 404***	IPX4	II 1 G Ex ia IIC T4 Ga	■ ■
	2760	3 AAA Alkaline ^A	0.1	5.7	204*, 141**, 95***, 42***	2h*, 3h 15m**, 5h**, 11h***	111*, 80**, 59***, 19***	3065*, 1606**, 861***, 88***	IPX4	N/A	■ ■ (translucent)
	2765Z0	3 AAA Alkaline ^A	0.1	5.7	105*, 104**, 65***, 33***	4h 15min*, 4h**, 6h 15m***, 9h***	107*, 93**, 63***, 9***	2876*, 2163**, 978***, 18***	IPX4	II 1 G Ex ia IIC T4 Ga	■ ■
	2780R	Rechargeable Lithium-Ion ^A	0.25	7.6	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ ■ (photoluminescent)
	2785Z1	4 AA Alkaline ^A	0.3	7.6	Main: 215*, 106**, 22***	Main: 5h*, 13h**, 98h***	Main: 108*, 76**, 34***	2911*, 1445**, 290***	IP54	II 2 G Ex ib IIC T4 Gb	■ ■
	2250	2 AA Alkaline ^A	0.09	9.8	7	5h 30m	54	726	IPX4	CI II, D2	■
RIGHT ANGLE LIGHTS	3315RZ1-RA	Rechargeable Lithium-Ion		21	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IPX7	II 2G Ex ib op is IIC T4 Gb	■
	3610Z0	4 AA Alkaline	0.3	19.1	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
	3660Z1	Rech. 4 AA NiMH A	0.3	19.1	181	5h	183	8414	IPX7	II 2 G Ex ib IIC T4 Gb	■
	3715Z0	4 AA Alkaline	0.41	13.6	189*, 90***, 23***	4h*, 7h***, 31h***	249*, 157***, 24***	15552*, 6150***, 150***	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	■
	3765Z0	4 AA NiMH	0.41	13.6	194*, 92***, 24***	3h 30m*, 6h 45m***, 20h 30m***	256*, 161***, 24***	16392*, 6454***, 146***	IPX4	II 1 G Ex ia op is IIC T3 Ga	■

*High | **Medium | ***Low | ****Downcast | ^ Batteries Included | Additional approvals may apply. For details go to www.peli.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUNTIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	APPROVALS	COLOURS
1900Z1	2 AAA Alkaline [^]	0.05	10.4	11	1h 30m	45	571	IPX7	II 2 G Ex e ib IIB T4 Gb, II 2 D Ex ib IIIC T100°C Db	■ ■
1930Z0	4 LR 44 Alkaline [^]	0.03	6.7	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	■
1965Z0	2 AAA Alkaline [^]	0.05	13.9	34	3h 45m	45	512	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da	■ ■
2000Z1	3 C Alkaline	0.36	19.8	39	6h	177	7852	IPX7	II 2 G Ex e ib IIC T4 Gb, II 2 G Ex e ib IIC T150°C Gb	■ ■
2010Z0	3 C Alkaline	0.38	20.6	129	22h	135	4582	IPX7	II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X	■
2220Z1	2 CR2032 Lithium [^]	0.03	8.9	9	34h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■ ■
2400Z1	4 AA Alkaline [^]	0.2	16.5	38	4h 30m	156	6194	IPX7	II 2 G Ex e ib IIC T4 Gb	■ ■
2410Z0	4 AA Alkaline [^]	0.21	17.8	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■ ■
2460Z1	Rechargeable NiMH [^]	0.22	17.8	112	4h 30m	153	5828	IPX7	II 2 G Ex ib IIC T4 Gb	■
2610Z0	3 AAA Alkaline [^]	0.91	3.8	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■
2690Z0	3 AAA Alkaline [^]	0.12	7.1	74	11h	92	2124	IPX7	I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da	■
2745Z0	3 AAA Alkaline [^]	0.94	5.7	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IPX4	II 1 G Ex ia IIC T4 Ga	■ ■
2755Z0	3 AAA Alkaline [^]	0.1	5.7	72*, 34***	6h*, 15h***	57*, 40***	807*, 404***	IPX4	II 1 G Ex ia IIC T4 Ga	■ ■
2765Z0	3 AAA Alkaline [^]	0.1	5.7	105*, 104**, 65***, 33****	4h 15min*, 4h**, 6h 15m***, 9h****	107*, 93**, 63***, 9****	2876*, 2163**, 978***, 18****	IPX4	II 1 G Ex ia IIC T4 Ga	■ ■
2785Z1	4 AA Alkaline [^]	0.3	7.6	Main: 215*, 106**, 22***	Main: 5h*, 13h*, 98h***	Main: 108*, 76**, 34***	Main: 2911*, 1445**, 290***	IP54	II 2 G Ex ib IIC T4 Gb	■ ■
3315Z0	3 AA Alkaline [^]	0.18	15.6	138	19h	146	5350	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	■
3315RZ1	Rechargeable Lithium-Ion [^]	0.2	15.5	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IPX7	II 2G Ex ib op is IIC T4 Gb	■
3315RZ1-RA	Rechargeable Lithium-Ion		21	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IPX7	II 2G Ex ib op is IIC T4 Gb	■
3325Z0	3 AA Alkaline [^]	0.17	15.4	155	16h	140	4926	IPX7	II 1 G Ex ia IIC T4 Ga	■
3610Z0	4 AA Alkaline	0.3	19.1	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
3660Z1	Rech. 4 AA NiMHA	0.3	19.1	176	3h 45m	183	8414	IPX7	II 2 G Ex ib IIC T4 Gb	■
3715Z0	4 AA Alkaline	0.41	13.6	189*, 90***, 23****	4h*, 7h***, 31h****	249*, 157***, 24****	15552*, 6150***, 150****	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	■
3765Z0	4 AA NiMH	0.41	13.6	194*, 92***, 24****	3h 30m*, 6h 45m***, 20h 30m****	256*, 161***, 24****	16392*, 6454***, 146****	IPX4	II 1 G Ex ia op is IIC T3 Ga	■
9415Z0	4 C NiMH [^]	1.65	22.2	392*, 144***	4h 30m*, 11h***	392*, 234***	32767*, 13747***	IPX4	II 1 G Ex ia IIC T4 Ga	■

*High | **Medium | ***Low | ****Downcast | ^ Batteries Included | Additional approvals may apply. For details go to www.peli.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

CUSTOM LABELS

Peli Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Peli lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colours. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and moulding programs.



GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the torch of your choice.



HOT STAMPING

Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply



100% ACCURACY

Peli's strict QA inspection team will check for quality of print and 100% accuracy in colour and placement.

PELI LIGHTING TOOLS: MORE THAN A TORCH.

Here are just a few features that make our lighting tools shine:



LEGENDARY LIFETIME* GUARANTEE



SELF PROGRAMMABLE
(Selected models only)



GESTURE ACTIVATION
(On selected models only)



USB RECHARGEABLE
(On selected models only)



PHOTOLUMINESCENT DESIGNS
(Selected models only)





PIVOTING 60° HEAD
(On selected models only)



DOWNCAST LIGHTING FEATURES
(On selected models only)

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO TORCHES ONLY). All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com

SMALL LIGHTS PGS 06-07												
1810	1900	1900Z1	1910	1920	1930	1930Z0	1965Z0	2220Z1	2300	2340		
												
MEDIUM LIGHTS PGS 08 - 10												
1800	2000	2000Z1	2010	2010Z0	2400	2400Z1	2410	2410Z0	2450	2460	2460Z1	
												
MEDIUM LIGHTS PGS 08 - 10						LARGE LIGHTS PGS 11		ATEX LIGHTS ZONE 0 & 1 (CAT. 1 & 2) PGS 12 - 15				
3310PL	3310ELS	3315Z0	3315RZ1	3315RZ1-RA	3325Z0	9410L	9415Z0	1900Z1	1930Z0	1965Z1	2000Z1	
												
ATEX LIGHTS ZONE 0 & 1 (CAT. 1 & 2) PGS 12 - 15												
2010Z0	2220Z1	2400Z1	2410Z0	2460Z1	2610Z0	2690Z0	2745Z0	2755Z0	2765Z0	2785Z1	3315Z0	3315RZ1
												
ATEX LIGHTS ZONE 0 & 1 (CAT. 1 & 2) PGS 12 - 15						TACTICAL LIGHTS PGS 16 - 17						
3315RZ1-RA	3325Z0	3610Z0	3660Z1	3715Z0	3765Z0	9415Z0	2350	2360	2370	2380	2380R	7000
												
TACTICAL LIGHTS PGS 16 - 17						HEADLAMPS PGS 18 - 19						
7060	7100	7600	8050	8060	2610Z0	2680	2690Z0	2720	2740	2745Z0		
												
HEADLAMPS PGS 18 - 19						RIGHT ANGLE LIGHTS PGS 20						
2750	2755Z0	2760	2765Z0	2780R	2785Z1	2250	3315RZ1-RA	3610Z0	3660Z1	3715Z0	3765Z0	
												